

012710

Technik die verbindet
technology that bonds

monoflow 20 monoflow 200

pneumatic mono-component sealing unit



monoflow 20




monoflow 200

Technische Änderungen vorbehalten/subject to change without prior notice

Our hand sealing units are very strong and powerful machines that fulfil all requirements of the processing of modern mono-component sealants and adhesives in a superior way.

A solid construction guarantees easy handling and maintainability on a high standard.

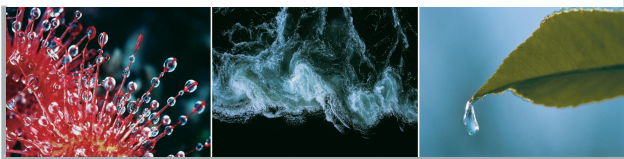

Technik die verbindet
technology that bonds

monoflow 20 monoflow 200

pneumatic mono-component sealing unit

technical data

output
pneumatic requirements
dimensions (l x w x h)
weight
article number

monoflow 20
max. 2,500 g/ min.
6 bar, 600 l/ min.
600 x 400 x 1,300 mm
250 kg
2111-0001-1000

monoflow 200
max. 2,500 g/ min.
6 bar, 600 l/ min.
1,000 x 1,150 x 1,800 mm
450 kg
2113-0001-1000

* depending on viscosity, temperature, batch etc. of material

standard equipment

monoflow 20

- teflon-coated following plate for 20 l hobbock
- 2.5 m water-vapour tight high pressure teflon hose
- 2 lifting columns
- high pressure sealing gun
- mobile unit on wheels

monoflow 200

- teflon-coated following plate for 200 l hobbock
- 2.5 m water-vapour tight high pressure teflon hose
- 2 lifting columns
- high pressure sealing gun

special equipment

monoflow 20

- sealing gun Ultra-Light
- material pressure regulator for pulsation reduction
- drum empty control with pump stop
- cartridge filling unit

monoflow 200

- sealing gun Ultra-Light
- material pressure regulator for pulsation reduction
- drum empty control with pump stop
- heated following plate
- mobile unit on wheels
- cartridge filling unit
- swivel arm

further options on request