

012710

Technik die verbindet  
technology that bonds

## ecomix XS 2-k


hydraulic 2-component mixing and metering unit



Technische Änderungen vorbehalten/subject to change without prior notice

The mixing and metering units of the **ecomix**-series are solid and powerful machines, which are uncompromisingly geared to functionality.

The **ecomix XS 2-k** has been especially designed for the processing of high-viscosity booster-materials used in window bonding for example. It is equipped as standard with a 2-component gun, that allows the usage of disposable mixers. Thereby the loss of material due to base purging as well as the costs for consumables and spare parts are reduced to a minimum.

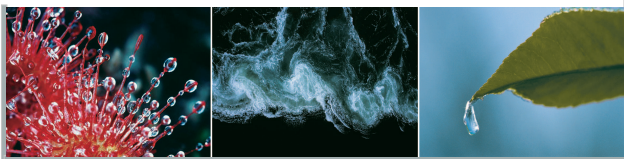

Technik die verbindet  
technology that bonds

## ecomix XS 2-k

hydraulic 2-component mixing and metering unit

### technical data

output max.  
propulsion A-side  
propulsion B-side  
power supply  
compressed air requirement  
dimensions l x w x h without/with arm  
standard swivel arm length  
standard hose length  
weight  
**article number**

3,500 g/min.\*  
hydraulic  
pneumatic  
3 x 400 V + N + PE/ 3.8 kW  
6 bar, 50 liter/min.  
1,500 x 1,000 x 1,800/ 2,500 [mm]  
1,900 mm  
2,500 mm  
approx. 600 kg  
**2252-0002-1000**

\*depending on viscosity, temperature, material batch etc.



2-component gun with disposable mixer

### equipment

- Siemens relay control
- pot life control with visual and audible warning signal
- overpressure safety device
- material shortage control
- two-hands safety control
- drum empty control with pump shut-down
- waste optimized following plate
- maintenance-free pump sealing system
- infinitely adjustable mixing ratio
- manual mixing ratio control
- optimized change of drums (base plate with notches for jack lift)
- 200 l A-following plate / 20 l B-following plate

### Optional equipment

- heated following plate A-component
- mobile unit on wheels

further options on request