


012710

Technik die verbindet  
technology that bonds

## ecomix XS

hydraulic 2-component mixing and metering unit

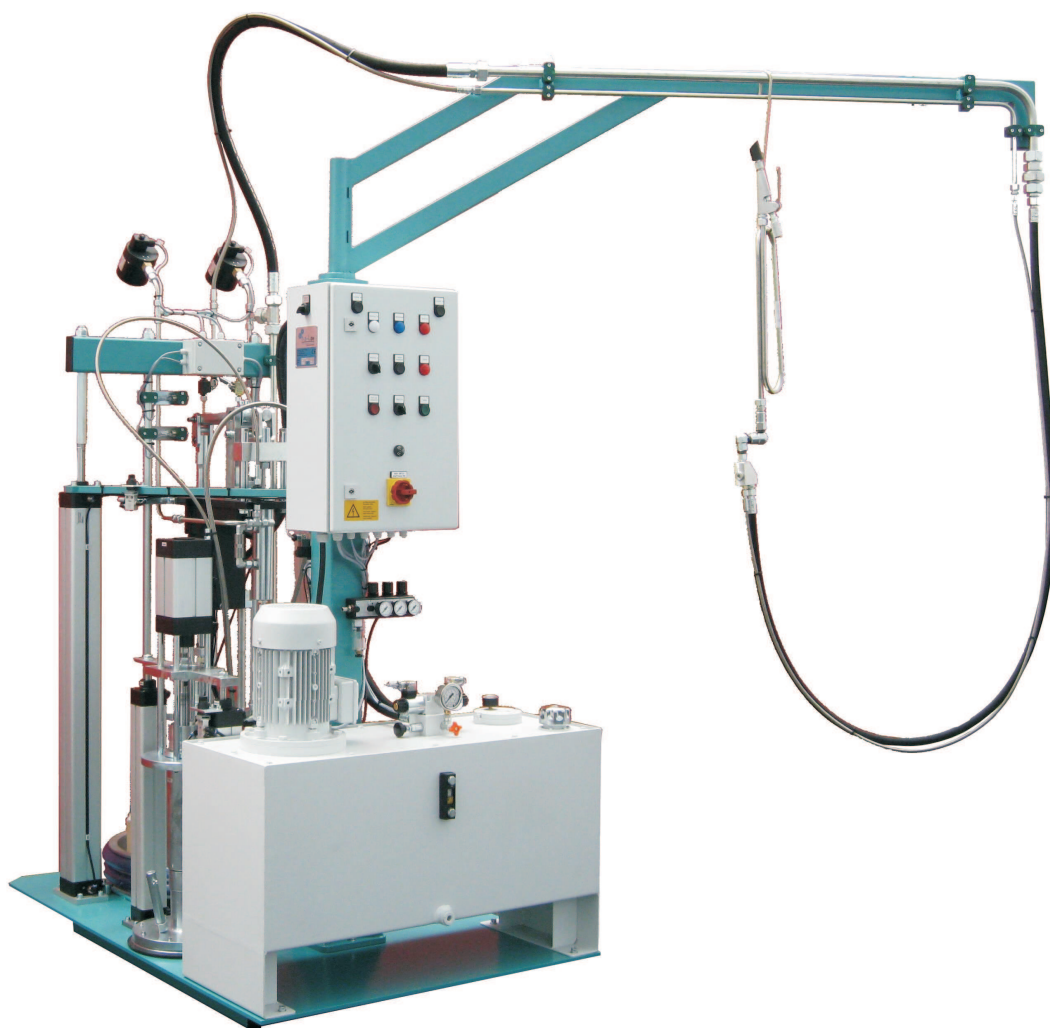


Technische Änderungen vorbehalten/subject to change without prior notice

The **ecomix XS** is a solid and powerful mixing and metering unit, which is uncompromisingly geared to functionality.

Special attention has been paid to maintainability and robustness by choosing German quality components only.

The **ecomix XS** combines well proven technology with an unbeatable cost/performance ratio.

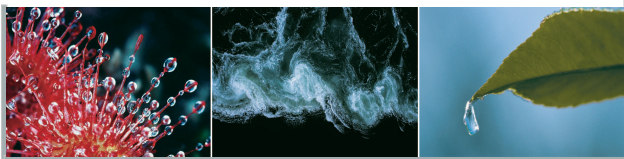

Technik die verbindet  
technology that bonds

## ecomix XS

hydraulic 2-component mixing and metering unit

### technical data

outflow max.  
A-side powered  
B-side powered  
power supply  
compressed air requirement  
dimensions l x w x h/with arm  
standard swivel arm length  
standard hose length  
weight appr.


3,500 g/min. \*  
hydraulic  
pneumatic  
3 x 400 V + N + PE/ 3,8 kW  
6 bar, 50 liter/ min.  
1,500 x 1,000 x 1,800/ 2,500 mm  
1,900 mm  
2,500 mm  
650 kg

**article number**

**2252-0001-1000**

\* depends on viscosity, temperature, charge etc.

### equipment

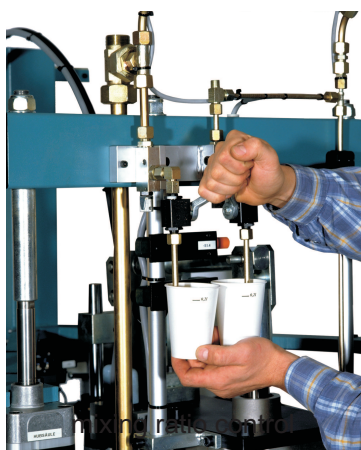

- Siemens relay control
- pot life control with visual and audible warning signal
- overpressure safety device
- material shortage control
- two-hand safety control
- drum empty control with pump shutdown
- base purging
- waste optimized following plate
- maintenance-free pump sealing system
- infinitely adjustable mixing ratio
- mixing ratio control
- optimized change of drums (base plate with notches for jack lift)
- 200 l A- following plate / 20 l B-following plate

### optional equipment

- heated following plate A-component
- purge pump
- mobile unit with wheels

further options on request