

AIRFLOW™ 1 VBA 100 HP

200 ML CARTRIDGE DISPENSER



Model shown: AirFlow 1 VBA 100 HP 200 mL

FEATURES

- Minimum trigger pressure
- Snap fit cartridge straps
- Quick exhaust valve
- Customization possible

BENEFITS

- For effortless use and minimum fatigue
- For optimal cartridge support
- Prevents run-on
- Customer labelling

APPLICATIONS




Bonding



Chemical
Anchoring

PRODUCT BY RANGE

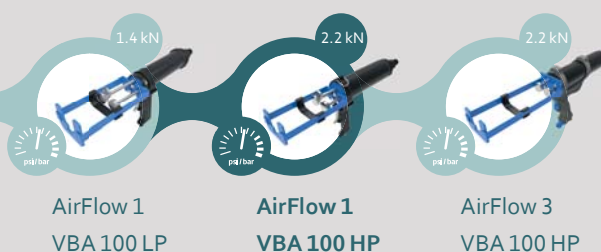


THE AIRFLOW 1 VBA 100 HP 2-COMPONENT PNEUMATIC DISPENSER OFFERS FAST, ACCURATE AND EFFORTLESS APPLICATION, WHILE THE U-OPENING STEEL FRAME ALLOWS FOR EASY INSERTION AND REMOVAL OF CARTRIDGES.

SPECIFICATIONS

- Weight: 1.7 kg / 3.7 lbs
- Frame Length: 172 mm / 6.7 in
- Maximum Thrust: 2.2 kN
- Maximum Pneumatic Pressure: 6.8 bar / 100 psi
- Air Consumption: 40 litres/min
- Handle Material: Aluminum
- Frame Material: Steel
- Tool Component Approvals: CE, REACH
- Cartridge Capacity: 200 mL (7 oz)
- Cartridge Ratio: 1:1
- Viscosity: Low/Medium
- Standard Color: Black/Blue
- Customized versions on demand

DIMENSIONS

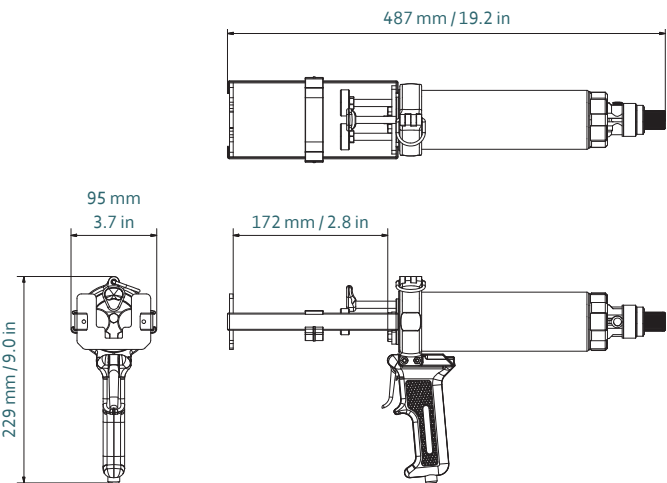


Part number	Article number	Packaging
DP2C 200-01-220-201	177855 / A100LP (US)	1 per Box

MATCHING MIXPAC™ SIDE-BY-SIDE CARTRIDGES



C-System/F-System
200 mL / 1:1 PP/PA

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



Plastic Cartridge
200 mL / 1:1 PP/PA

	1:1	mm	inch
l		148.0	5.83
a		Ø 37.0	Ø 1.46
c		79.0	3.11

CONVERSION KITS

MATCHING ACCESSORIES